Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 143132

ACTUAL SIZE



CMC 321 LENSE

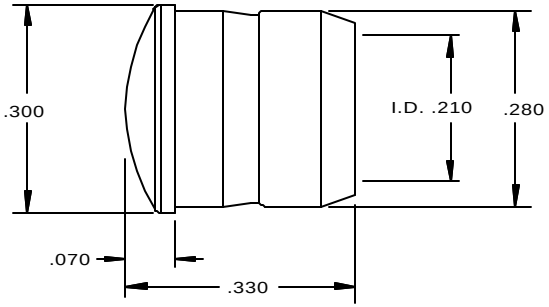

RNG 268



RNG 234



ORDERING CODES

CMC 321 RTP

MODEL

CMC 321 (LENS)
RNG 234 (RETAINER)
RNG 268 (RETAINER)

COLOR

RTP Red Transparent
ATP Amber Transparent
GTP Green Transparent
BTP Blue Transparent
YTP Yellow Transparent
CTP Clear Transparent



PCB TO PANEL MOUNTING

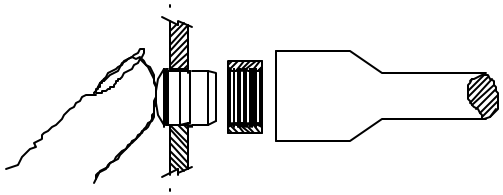

RETAINING RING INSTALLATION

Hold the lense tight to the panel using any suitable device which will not mark the lense surface. Press the ring into place using a 5/16" nut driver.

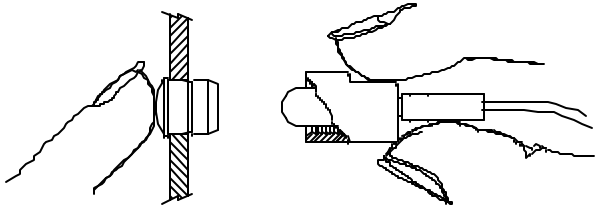

CONNECTOR INSTALLATION

Hold the lense tight to the panel using any suitable device which will not mark the lense surface. Press the connector into place.

NOTES:

MATERIAL: Lens - Polycarbonate
Retaining Ring - Polypropylene
DESIGN: Low profile lens using fresnel rings.
MOUNTING: Mounts thru the front of panel.
Hole size 9/32" (7.2mm) on 3/8" centers.
For PCB mounted LED use RNG 268 Retainer.
Panel thickness with CNX connector:
.030 to .070 use RNG 234 spacer
.105 to .130 None Required

See VCC brochure for information on CNX connectors.

U.S. PAT. PEND.

REVISIONS			
NO	DESCRIPTION	DATE	BY
1			
2			
3			
4			
5			

CLIPLITE® CMC 321 LENSE

VCC VISUAL COMMUNICATIONS COMPANY, INC.
7920-F Arjons Drive San Diego, California 92126 U.S.A.
Phone (858) 549-6900 Fax (858) 549-3520 e-mail vccsales@vcclite.com

TOLERANCES		SCALE	N/A	DATE	11/07/99
DECIMAL	±.010	DIAMETER	.003 TIR	DRAWN BY	JMS
ANGLE	± 30'	RADII	.008 Max	CHK'D	

DRAWING NO. CMC 321A